

TRANSFORMERS

3Ø UL(UL5085) Certified Transformers (삼상 UL 트랜스)

E529977

BH3TB-HE UL Series




Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	380 or 400 or 415 or 440 or 460 or 480
Operating Frequency	60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

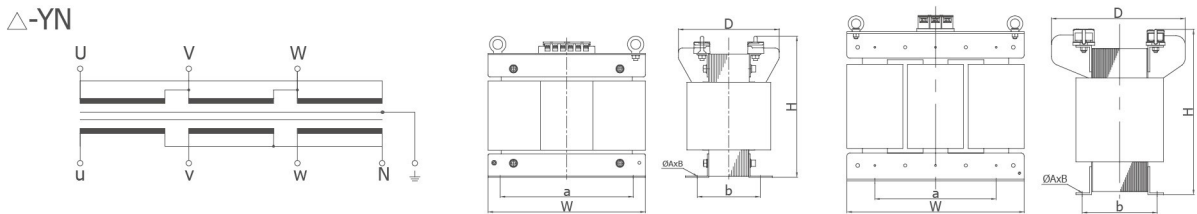

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

TYPE (형식명)	Specification (사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap	W	D	H	a	b	A×B		
BH3TB - HE10KUL	380	380	10KVA	390	280	350	330	196	12×30	107	Eye Bolts
- HE15KUL	or	or	15KVA	452	280	388	380	198		129	
- HE20KUL	400	400	20KVA	452	310	388	380	228		160	
- HE30KUL	or	or	30KVA	500	350	423	425	250		218	
- HE40KUL	415	415	40KVA	540	415	510	370	221		235	
- HE50KUL	or	or	50KVA	570	430	535	390	241		300	
- HE60KUL	440	440	60KVA	590	435	560	400	241		330	
- HE75KUL	or	or	75KVA	620	455	570	420	251		365	
- HE100KUL	460	460	100KVA	710	485	620	480	263		14×30	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN