

TRANSFORMERS

1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

BHTB-HG UL Series




Technical Specifications

Primary Voltage	200 or 208 or 220 or 230 or 240
Secondary Voltage	100 or 110 or 115 or 120
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085-1/2

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

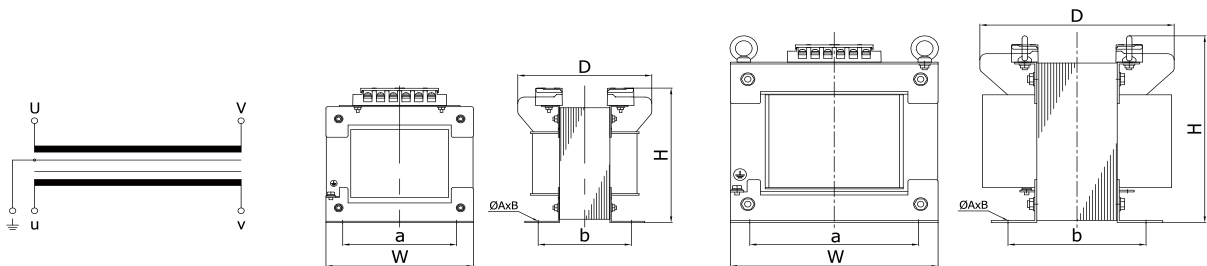

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØAxB		
BHTB-HG100UL	200 or 208 or 220 or 230 or 240	100 or 110 or 115 or 120	100VA	110	130	115	94	87	5×8	3.8	
BHTB-HG200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB-HG300UL			300VA	138	140	138	110	89		6.8	
BHTB-HG500UL			500VA	156	170	162	130	104	6×10	10	
BHTB-HG750UL			750VA	182	180	184	160	118	8×20	15	
BHTB-HG1KUL			1KVA	182	180	184	160	118		16	
BHTB-HG1.5KUL			1.5KVA	182	200	184	160	138	20		
BHTB-HG2KUL			2KVA	220	205	220	170	139	25		
BHTB-HG3KUL			3KVA	251	230	245	195	157	10×25	39	Eye Bolts
BHTB-HG5KUL			5KVA	270	250	265	220	174		50	
BHTB-HG7.5KUL			7.5KVA	310	300	310	252	206	13×30	79	
BHTB-HG10KUL			10KVA	310	340	310	252	236		100	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

TRANSFORMERS

1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

BHTB-HM UL Series




Technical Specifications

Primary Voltage	200 or 208 or 220 or 230 or 240
Secondary Voltage	200 or 208 or 220 or 230 or 240
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

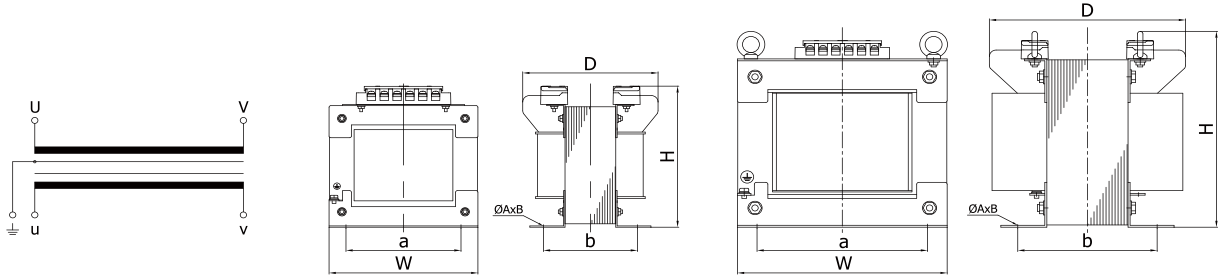

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B		
BHTB-HM100UL	200 or 208 or 220 or 230 or 240	200 or 208 or 220 or 230 or 240	100VA	110	130	115	94	87	5×8	3.8	
BHTB-HM200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB-HM300UL			300VA	138	140	138	110	89		6.8	
BHTB-HM500UL			500VA	156	170	162	130	104	6×10	10	
BHTB-HM750UL			750VA	182	180	184	160	118	8×20	15	
BHTB-HM1KUL			1KVA	182	180	184	160	118		16	
BHTB-HM1.5KUL			1.5KVA	182	200	184	160	138	10×25	20	
BHTB-HM2KUL			2KVA	220	205	220	170	139		25	
BHTB-HM3KUL			3KVA	251	230	245	195	157	13×30	39	Eye Bolts
BHTB-HM5KUL			5KVA	270	250	265	220	174		50	
BHTB-HM7.5KUL			7.5KVA	310	300	310	252	206	79		
BHTB-HM10KUL			10KVA	310	340	310	252	236	100		

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

TRANSFORMERS

1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

BHTB-HN UL Series





Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	100 or 110 or 115 or 120
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

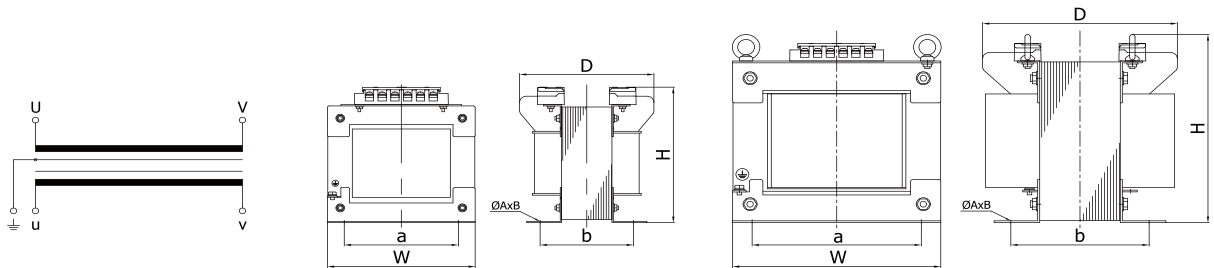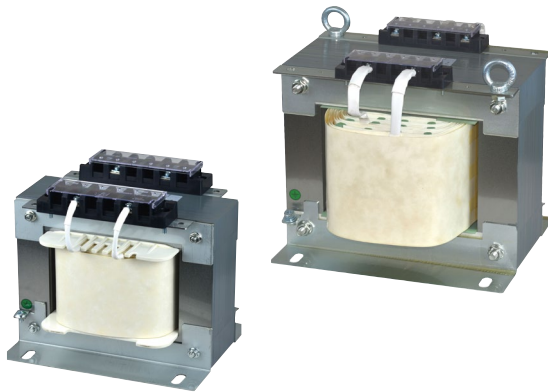

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B		
BHTB-HN100UL	380 or 400 or 415 or 440 or 460 or 480	100 or 110 or 115 or 120	100VA	110	130	115	94	87	5×8	3.8	
BHTB-HN200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB-HN300UL			300VA	138	140	138	110	89		6.8	
BHTB-HN500UL			500VA	156	170	162	130	104	6×10	10	
BHTB-HN750UL			750VA	182	180	184	160	118	8×20	15	
BHTB-HN1KUL			1KVA	182	180	184	160	118		16	
BHTB-HN1.5KUL			1.5KVA	182	200	184	160	138	10×25	20	
BHTB-HN2KUL			2KVA	220	205	220	170	139		25	
BHTB-HN3KUL			3KVA	251	230	245	195	157	13×30	39	Eye Bolts
BHTB-HN5KUL			5KVA	270	250	265	220	174		50	
BHTB-HN7.5KUL			7.5KVA	310	300	310	252	206	79		
BHTB-HN10KUL			10KVA	310	340	310	252	236	100		


TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

TRANSFORMERS

1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

BHTB-HQ UL Series

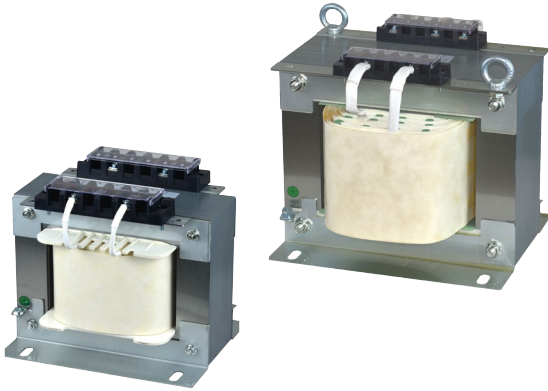


Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	200 or 208 or 220 or 230 or 240
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

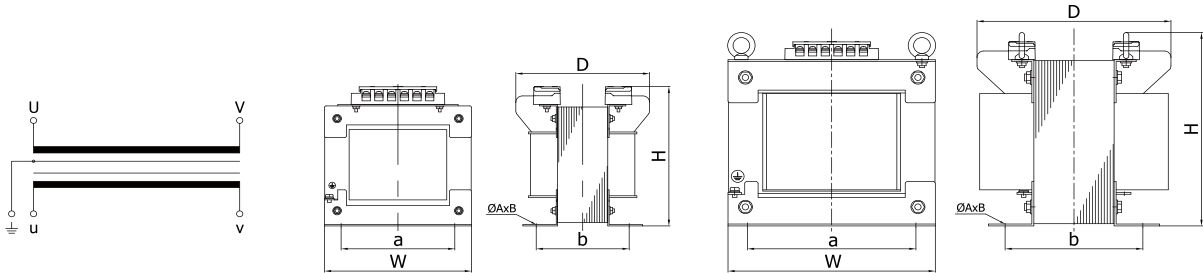

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B		
BHTB-HQ100UL	380 or 400 or 208 or 415 or 220 or 440 or 230 or 460 or 240 or 480	200 or 208 or 220 or 230 or 240	100VA	110	130	115	94	87	5×8	3.8	
BHTB-HQ200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB-HQ300UL			300VA	138	140	138	110	89	6×10	6.8	
BHTB-HQ500UL			500VA	156	170	162	130	104	6×10	10	
BHTB-HQ750UL			750VA	182	180	184	160	118	8×20	15	
BHTB-HQ1KUL			1KVA	182	180	184	160	118	8×20	16	
BHTB-HQ1.5KUL			1.5KVA	182	200	184	160	138	10×25	20	
BHTB-HQ2KUL			2KVA	220	205	220	170	139	10×25	25	
BHTB-HQ3KUL			3KVA	251	230	245	195	157	10×25	39	Eye Bolts
BHTB-HQ5KUL			5KVA	270	250	265	220	174	13×30	50	
BHTB-HQ7.5KUL			7.5KVA	310	300	310	252	206	13×30	79	
BHTB-HQ10KUL			10KVA	310	340	310	252	236	13×30	100	

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN