

TRANSFORMERS

1Ø UL+EN (CE) Certified Transformers (단상 UL+CE인증 트랜스)

UL+CE

BHTB-Q UC Series



Technical Specifications

Primary Voltage	R380_400_415_440_480V
Secondary Voltage	200_208_R220_230V
Operating Frequency	50/60Hz
Insulation Class	B Class
Standard	UL Insulation System EN61558-2-4

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.


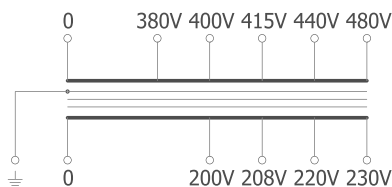


Fig.1

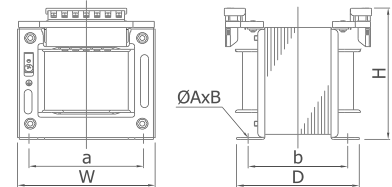


Fig.2

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØAxB			
BHTB-Q50UC	480V 440V 415V 400V 380V 0	230V 220V 208V 200V 0	50	79	91	87	65	70	5×8	1.47	Fig. 1	
-Q100UC			100	90	101	95	72	77		2.25		
-Q200UC			200	110	115	116	94	87		3.82		
-Q300UC			300	117	116	122	96	88	5×10	4.65		
-Q500UC			500	138	129	139	110	94		7.33		
-Q750UC			750	156	158	155	130	104	6×10	10.1		Fig. 2
-Q1KUC			1k	156	167	156	130	113		11.8		
-Q1.5KUC			1.5k	185	153	178	160	122	8×20	16.1		
-Q2KUC			2k	185	173	178	160	141		20		

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN