3Ø UL(UL5085) Certified Transformers (삼상 UL 트랜스)

E529977

BH3TB-HC UL Series

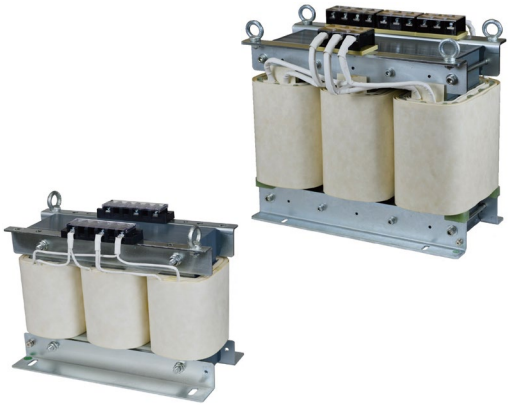

■ Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	200 or 208 or 220
Operating Frequency	60Hz
Insulation Class	H Class
Standard	UL 5085 – 1/2

■ Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

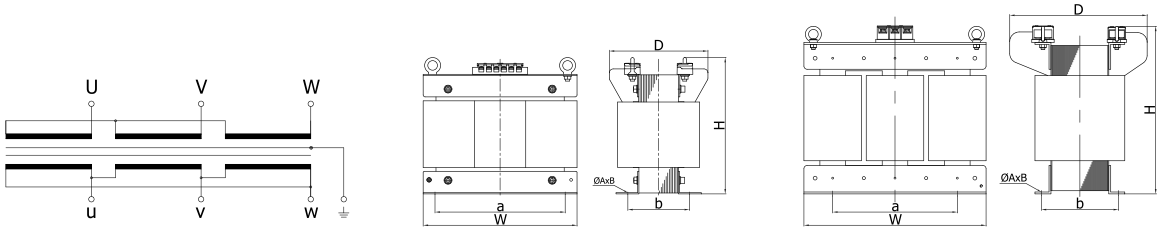

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOPU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

TYPE (형식명)	Specification (사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap	W	D	H	a	b	ØA×B		
BH3TB – HC500UL	380 or 400 or 415 or 440 or 460 or 480	200 or 208 or 220	500VA	191	145	173	160	111	8×20	13	Eye Bolts
– HC1KUL			1KVA	231	158	204	170	114		18.7	
– HC1.5KUL			1.5KVA	272	195	242	215	125	10×25	26.7	
– HC2KUL			2KVA	272	195	242	215	125		28.7	
– HC3KUL			3KVA	330	210	290	270	146		46.8	
– HC5KUL			5KVA	330	230	286	270	166		58	
– HC7.5KUL			7.5KVA	390	240	350	330	156	12×30	78	
– HC10KUL			10KVA	390	280	350	330	196		107	
– HC15KUL			15KVA	452	280	388	380	198		129	
– HC20KUL			20KVA	452	310	388	380	228		160	
– HC30KUL			30KVA	500	350	423	425	250		218	
– HC40KUL			40KVA	540	415	510	370	221		235	
– HC50KUL			50KVA	570	430	535	390	241		300	
– HC60KUL			60KVA	590	435	560	400	241		330	
– HC75KUL			75KVA	620	455	570	420	251		365	
– HC100KUL			100KVA	710	485	620	480	263	14×30	475	
– HC120KUL			120KVA	710	500	670	480	258		485	
– HC150KUL			150KVA	750	490	740	510	238	18×35	550	
– HC200KUL			200KVA	770	560	760	520	278		700	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

BUMHAN
94-5, Deokcheon-ro, Manan-gu, Anyang-si, Gyeonggi-do, 14086 Republic of Korea
Tel. +82-31-465-8897 Fax. +82-31-465-8890 www.bh21.co.kr bh@bh21.co.kr