

TRANSFORMERS

3Ø UL(UL5085) Certified Transformers (삼상 UL 트랜스)

E529977

BH3TB-HA UL Series




Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	200 or 208 or 220
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 – 1/2

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.

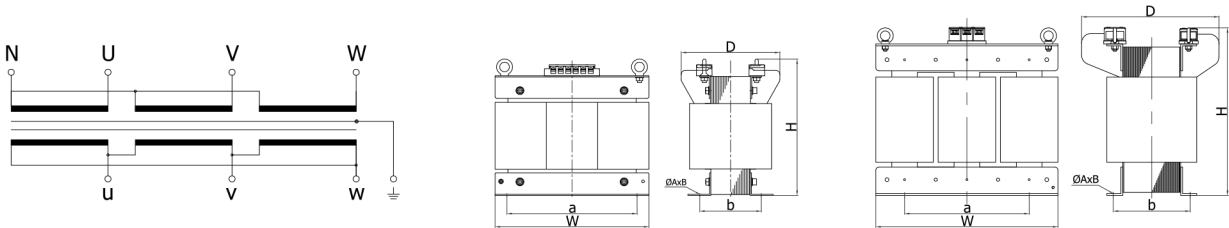

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOPU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

TYPE (형식명)	Specification (사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap	W	D	H	a	b	ØA×B		
BH3TB – HA500UL	380 or 400 or 415 or 440 or 460 or 480	200 or 208 or 220	500VA	191	169	179	160	111	8×20	13	
– HA1KUL			1KVA	231	169	211	170	114	8×20	18,7	
– HA1.5KUL			1.5KVA	272	195	242	215	125	10×25	26.7	
– HA2KUL			2KVA	272	195	242	215	125		28,7	
– HA3KUL			3KVA	330	210	290	270	146		46,8	
– HA5KUL			5KVA	330	230	286	270	166	12×30	58	
– HA7.5KUL			7.5KVA	390	240	350	330	156		78	
– HA10KUL			10KVA	390	280	350	330	196		107	
– HA15KUL			15KVA	452	280	388	380	198		129	Eye Bolts
– HA20KUL			20KVA	452	310	388	380	228		160	
– HA30KUL			30KVA	500	370	418	425	250		218	
– HA40KUL			40KVA	540	415	510	370	221		235	
– HA50KUL			50KVA	570	430	535	390	241		300	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN