

TRANSFORMERS

3Ø UL(UL5085) Certified Transformers (삼상 UL 트랜스)

E529977

BH3TB-HF UL Series








Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	200 or 208 or 220
Operating Frequency	60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.

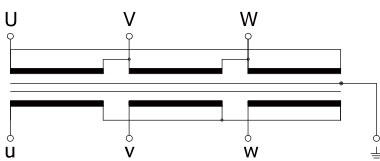

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

TYPE (형식명)	Specification (사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA x B		
BH3TB -HF150UL	380 or 400 or 415 or 440 or 460 or 480	200 or 208 or 220	150	159	135	146	130	85	8×20	5.8	Eye Bolts
-HF500UL			500	191	169	179	160	111	8×20	13	
-HF1KUL			1K	231	169	211	170	114	8×20	18.7	
-HF1.5KUL			1.5K	272	195	242	215	125	10×25	26.7	
-HF2KUL			2K	272	195	242	215	125	10×25	28.7	
-HF3KUL			3K	330	210	290	270	146	10×25	46.8	
-HF5KUL			5K	330	230	286	270	166	10×25	58	
-HF7.5KUL			7.5K	390	240	350	330	156	10×25	78	
-HF10KUL			10K	390	280	350	330	196	10×25	107	
-HF15KUL			15K	452	280	388	380	198	10×25	129	
-HF20KUL			20K	452	310	388	380	228	10×25	160	
-HF30KUL			30K	500	370	420	425	250	12×30	218	
-HF40KUL			40K	540	415	510	370	221	12×30	235	
-HF50KUL			50K	570	430	535	390	241	12×30	300	
-HF60KUL			60K	590	440	560	400	241	12×30	330	
-HF75KUL			75K	620	455	570	420	251	12×30	365	
-HF100KUL			100K	710	485	620	480	263	14×30	475	
-HF120KUL			120K	890	530	685	600	278	18×35	570	
-HF150KUL			150K	940	520	720	640	268	18×35	630	

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN