

1Ø UL+EN(CE) Certified Transformers (단상 UL+CE인증 트랜스)

UL+CE

BHTB-G UC Series



Technical Specifications

Primary Voltage	200_R208_220_230_240V
Secondary Voltage	100_R110_120V
Operating Frequency	50/60Hz
Insulation Class	B Class
Standard	UL Insulation System EN61558-2-4

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.


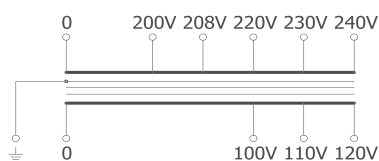


Fig.1

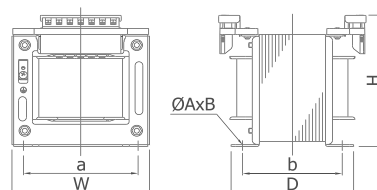


Fig.2

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape	
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B				
BHTB -G50UC	240V 230V 220V 208V 200V 0	120V 110V 100V 0	50	79	91	87	65	70	5×8	1.46	Fig. 1		
-G100UC			100	90	101	95	72	77		2.27			
-G200UC			200	110	115	116	94	87		3.82			
-G300UC					300	117	116	122	96	88	5×10	4.65	Fig. 2
-G500UC					500	138	129	139	110	94		7.23	
-G750UC					750	156	158	155	130	104	6×10	10.1	
-G1KUC					1k	156	167	156	130	113		11.7	
-G1.5KUC					1.5k	185	153	178	160	122	8×20	16	
-G2KUC					2k	185	173	178	160	141		19.7	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN