

TRANSFORMERS

1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

BHTB-HM UL Series




Technical Specifications

Primary Voltage	200 or 208 or 220 or 230 or 240
Secondary Voltage	200 or 208 or 220 or 230 or 240
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 – 1/2

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.

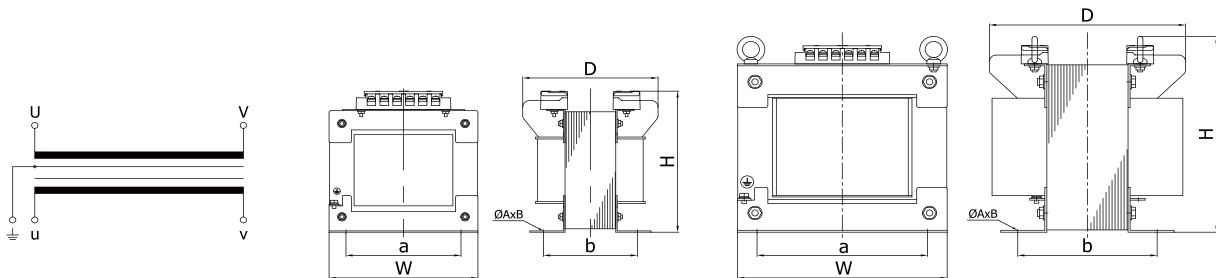

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B		
BHTB -HM100UL	200 or 208 or 220 or 230 or 240	200 or 208 or 220 or 230 or 240	100VA	110	130	115	94	87	5×8	3.8	
BHTB -HM200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB -HM300UL			300VA	138	140	138	110	89	5×10	6.8	
BHTB -HM500UL			500VA	156	170	162	130	104	6×10	10	
BHTB -HM750UL			750VA	182	180	184	160	118	8×20	15	
BHTB -HM1KUL			1KVA	182	180	184	160	118	8×20	16	
BHTB -HM1.5KUL			1.5KVA	182	200	184	160	138	8×20	20	
BHTB -HM2KUL			2KVA	220	205	220	170	139	10×25	25	
BHTB -HM3KUL			3KVA	251	230	245	195	157	10×25	39	
BHTB -HM5KUL			5KVA	270	250	265	220	174	10×25	50	
BHTB -HM7.5KUL			7.5KVA	310	300	310	252	206	13×30	79	Eye Bolts
BHTB -HM10KUL			10KVA	310	340	310	252	236	13×30	100	
BHTB -HM15KUL			15KVA	355	330	340	250	238	12×30	125	
BHTB -HM20KUL			20KVA	355	360	340	250	268	12×30	150	Eye Bolts 60Hz
BHTB -HM30KUL			30KVA	360	440	495	230	228	12×30	180	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN